

HaoSail

HaoSail

Consistent. Dynamic. Reliable.



SINGAPORE LH MACHINERY PTE LTD

5 Kian Teck Drive
Singapore 628822
Tel: (65) 6265 6010
Fax: (65) 6264 3214
Email: machinery@lamhongs.com.sg
www.lamhongs.com.sg

南方機械私人有限公司

DUBAI HAOSAIL GENERAL TRADING CO., L.L.C.

Address: P. O. BOX 25343, Dubai, UAE
Mobile: +971 55 4556817
Email: abdullahran@haosail.com
www.haosailmechanical.com

MAPUTO HAOSAIL MACHINERY COMPANY, LDA

Address: AV. De Mozambique no. 61272 R/C, Zimpeto, Maputo.
Mobile: +258 84 069 6699
Email: sales-mz@haosail.com
www.haosailmachinery.com

2021

CATALOGUE

FOCUS ON GENERAL MACHINERY



COMPANY PROFILE

Qingdao Haosail Machinery Co., Ltd. focuses on the sales of general mechanical equipment, hand and power tools, and high-end slings and riggings. Meanwhile, it is also committed to the integrated supply chain solution of technical design, quality inspection management and after-sales service of offshore mooring system. Haosail's core team has nearly 20 years of experience in general machinery industry, with rich product research and development, accurate cost control, precise product positioning, comprehensive technical support, perfect after-sales service and other all-round advantages. Haosail machinery's unified and standardized sales terminal, high-quality products and after-sales service, bring customers good shopping experience, thus establishing Haosail's good brand image, and laying the position of Haosail brand in overseas market. In recent years, Haosail machinery has been leveraging the strategic layout of "The belt and road" strategy for the whole country. It has applied the ODM mode to the design and manufacture of equipment and tools in the national market of the countries along the belt and road, and has built and constantly improved the comprehensive supply chain service including marketing promotion, product R & D, manufacturing, terminal management and after-sale service. All these efforts let customers think of "Haosail" as long as they have needs!

Haosail, worthy of your trust!



CONTENT



AUTO-MAINTENANCE EQUIPMENT 02~14



CONSTRUCTION EQUIPMENT 15~22



WOOD-WORKING MACHINES 23~28



ELECTROMECHANICAL EQUIPMENT 29~34



TOOLS 35~46

POWER TOOLS 36~40

AIR TOOLS 41~42

HAND TOOLS 43~46



LIFTING AND RIGGING PRODUCTS 47~56

AUTO-MAINTENANCE EQUIPMENT



3D 4 Wheels Alignment



Model	VD621
Camber Angle	Precision: $\pm 0.02^\circ$ Range: $\pm 10^\circ$
Caster Angle	Precision: $\pm 0.05^\circ$ Range: $\pm 10^\circ$
Kingpin Inclination Angle	Precision: $\pm 0.02^\circ$ Range: $\pm 20^\circ$
Toe	Precision: $\pm 0.02^\circ$ Range: $\pm 4.8^\circ$
Rear Exle Offset	Precision: $\pm 0.02^\circ$ Range: $\pm 4^\circ$
MAX. Steering Angle	Precision: $\pm 0.08^\circ$ Range: $\pm 45^\circ$
Thrust Angle	Precision: $\pm 0.02^\circ$ Range: $\pm 4^\circ$
Track Width Difference	Precision: $\pm 0.03^\circ$ Range: $\pm 4^\circ$
Front Set Back	Precision: $\pm 0.02^\circ$ Range: $\pm 4^\circ$
Rear Set Back	Precision: $\pm 0.02^\circ$ Range: $\pm 4^\circ$
Track Width	<265cm
Wheel Base	<533cm
Code	4.10.03.01.001



Model	VD612
Camber Angle	Precision: $\pm 0.02^\circ$ Range: $\pm 10^\circ$
Caster Angle	Precision: $\pm 0.05^\circ$ Range: $\pm 10^\circ$
Kingpin Inclination Angle	Precision: $\pm 0.02^\circ$ Range: $\pm 20^\circ$
Toe	Precision: $\pm 0.02^\circ$ Range: $\pm 4.8^\circ$
Rear Exle Offset	Precision: $\pm 0.02^\circ$ Range: $\pm 4^\circ$
MAX. Steering Angle	Precision: $\pm 0.08^\circ$ Range: $\pm 45^\circ$
Thrust Angle	Precision: $\pm 0.02^\circ$ Range: $\pm 4^\circ$
Track Width Difference	Precision: $\pm 0.03^\circ$ Range: $\pm 8^\circ$
Front Set Back	Precision: $\pm 0.02^\circ$ Range: $\pm 4^\circ$
Rear Set Back	Precision: $\pm 0.02^\circ$ Range: $\pm 4^\circ$
Track Width	<265cm
Wheel Base	<533cm
Code	4.10.03.01.002

Tool Cart



Model	KYC-040
Product Size	750x510x915mm
Number of drawers	7 Pcs
Package Size	800x570x915mm
N.W./G.W	69kg/85kg
Code	3.01.07.03.001

Tyre Changer



Model	DS-706B
Motor Power	220V 50Hz 750/1100W
Rim Clamping from Outside	9"-21"
Rim Clamping from Inside	13"-25"
Wheel Width	3"-14"
Operating Pressure	8-10bar
Noise Level	< 75dB
N.W/G.W	188kg/223kg
Package Size	1120x840x870mm
Code	4.10.01.02.005



Model	DS-706D
Motor Power	220V 50Hz 750/1100W
Rim Clamping from Outside	9"-21"
Rim Clamping from Inside	13"-25"
Wheel Width	3"-14"
Operating Pressure	8-10bar
Noise Level	< 75dB
N.W/G.W	226kg/248kg (Machine) 82kg/90kg (Accessory)
Package Size	1120x900x920mm (Machine) 1100x500x300mm (Accessory)
Code	4.10.01.02.006

Truck Tyre Changer



Model	DZ-T
Motor Power	380V 50Hz
Torque	3200 n/m
Speed	3.6 r/min
Rim Clamping	17.5", 19.5", 22.5"
N.W./G.W.	115 /140kg
Packing Size	1015 × 460 × 510mm
Code	4.10.04.04.001

Wheel Balancer



Model	DS-60A
Motor Power	220V 50Hz 250W
Rim Diameter	10"-24"
Rim Width	1.5"-16"
Max. Wheel Weight	70kg
Max. Wheel Diameter	1000mm
Rotating Speed	200rpm
Balance Precision	± 1g
N.W/G.W	82/110kg
Package Size	980x660x1000mm
Code	4.10.01.03.003




Model	DS-70A
Motor Power	220V 50Hz 250W
Rim Diameter	10"-24"
Rim Width	1.5"-16"
Max. Wheel Weight	70kg
Max. Wheel Diameter	1000mm
Rotating Speed	200rpm
Balance Precision	± 1g
N.W/G.W	89/119kg
Package Size	1000x730x1060mm
Code	4.10.01.03.004

Truck Tyre Vulcanizing Machine




Model	AJD-10
Rated Input	220V 50Hz 500W × 2
Ideal Temperature Range	145-165°C
Repair Area	140x120mm ²
N.W/G.W	20kg/21.5kg
Package Size	685x435x130mm
Code	4.10.01.01.003

Car Lifting Machine



Model	BDT240A	
Motor Power	380V 50Hz 2.2kW	220V 50Hz 2.2kW
Capacity	4T	
Lifting Height	1900mm	
Lifting Time	30-40s	
Weight	610kg	
Code	4.10.04.01.001	4.10.04.01.002

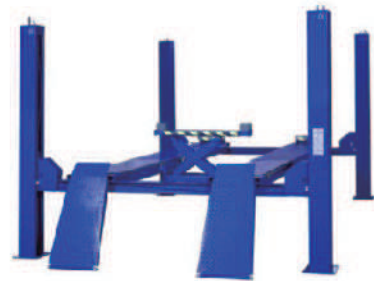

Model	BDT-4-40W
Motor Power	380V 50Hz 2.2kW
Capacity	3.5T
Lifting Height	1800mm
Lifting Time	<30s
Weight	1100kg
Code	4.10.04.01.003

Tyre Vulcanizer




Model	AJD-1
Rated Input	220V 50Hz 500W
Ideal Temperature Range	145-165°C
Repair Area	120x80mm ²
N.W/G.W	7.8kg/8.25kg
Package Size	325x190x390mm
Code	4.10.01.01.001



Model	AJD-2
Rated Input	220V 50Hz 450Wx2
Ideal Temperature Range	145-175°C
Repair Area	80x70mm ²
N.W/G.W	64kg/66kg
Package Size	740x320x1225mm
Code	4.10.01.01.002

Crimping Machine



Vehicle-mounted

Model	YJK-DC32
Motor Power	DC12V 2.2kW
Crimping Capacity	I.D. up to 1 1/4" (32mm)
1 Braided Wire	1 1/4"
2 Spiral Wire	1 1/4"
Crimp Force	2600kN
Weight	165kg
Package Size	450x480x460mm
Code	4.10.04.02.001



Quick change tools ■ Foot pedal

Model	YJK-51Z1
Motor Power	380V 50Hz 4kW
Crimping Capacity	I.D. up to 2" (51mm), O.D. up to 120mm
2 Braided Wire	2"
4 Spiral Wire	2"
6 Spiral Wire	1"
Crimp Force	3200kN
Weight	310kg
Package Size	800x500x1350mm

Pneumatic Grease Injector



Model	12L
Grease Output	0.85L/min
Air Pressure	0.6-0.8MPa
Tank Capacity	12L
Code	4.10.02.03.002



Model	35L
Grease Output	0.85L/min
Air Pressure	0.6-0.8MPa
Tank Capacity	35L
Code	4.10.02.03.003

High Pressure Washer



Model	1850-3.0S4A	3200-5.5T4A	1600PSI
Motor Power	220V 50Hz 3.0kW	380V 50Hz 5.5kW	220V 50Hz 3.0kW
Speed	1450rpm	1450rpm	1450rpm
Working Pressure	130bar (1885PSI)	220bar (3200PSI)	110bar (1600PSI)
Flow Rate	14L/min	15L/min	14L/min
Weight	68kg	88kg	68kg
Package Size	720x390x550mm	860x440x550mm	800x420x450mm
Code	4.10.02.01.001	4.10.02.01.002	4.10.02.01.003



Model	SML1800MG
Voltage	220V 50Hz, single phase
Induction Motor Power	1.8KW-2pole
Max Pressure	120Bar /1750PSI
Flow Rate	10L/min
Hose Length	9m
N.W./G.W	32kg /34kg
Package Size	670 × 415 × 375mm
Code	4.10.02.01.004



Model	2500GF	3600GF
Engine Type	Loncin Petrol 6.5HP	Loncin Petrol 13HP
Working Pressure	170Bar /2500PSI	250Bar /3625PSI
Flow Rate	17.0L/min	18.0L/min
Speed	3400R.P.M	3400R.P.M
N.W./G.W	42 /45kg	60 /63kg
Packing Dimension	1420 × 820 × 990mm	1420 × 820 × 990mm
Code	4.10.02.01.006	4.10.02.01.005

Air Hose Reel



Model	A02-Q810
Spec	8x12mm-10m
Pipe Material	PU/PU Package yam
Working Pressure	18 BAR
Package Size	285x160x325mm
N.W./G.W	3kg/3.5kg
Code	4.10.02.08.001

Pedal Grease Injector



Model	8L
Tank Capacity	8L
Weight	12kg
Code	4.10.02.03.001

Foam machine



Model	FF-Q909-1.2
Working Air Pressure	1-3BAR
Tank Volume	80L
Max Safety Valve Pressure	3 BAR
Package Size	400x400x750mm
N.W./G.W	17kg/19kg
Code	4.10.02.07.001

Repair Ramp



Model	5T
Rated Load	5T
N.W./G.W	19kg/20kg
Package Size	2pcs/1500x370x320mm
Code	4.10.04.04.001

Car Engine Disassembly Crane



Model	2T
Lifting Weight	2T
N.W./G.W	58kg/60kg
Packing Size	600x650x100mm/1420x300x200mm
Code	4.10.04.04.001

Vacuum Cleaner



Model	FC30L
Power	220V 50Hz 1400W
Airflow Rate	≥1.8 m³/min
Vacuity	≥21 Kpa
Noise	≤78dB(A)
Volume	30L
Weight	7.6kg
Package Size	360x357x640mm
Code	4.10.02.02.001



Model	FC60L
Power	220V 50Hz 1500W
Airflow Rate	≥3.2 m³/min
Vacuity	≥23 Kpa
Noise	≤80dB(A)
Volume	60L
Weight	26kg
Package Size	585x540x865mm
Code	4.10.02.02.002

Pump Oil Machine (multi-functional)



Model	70L
Tank Capacity	70L
The Measuring Cup Capacity	9L
Containment Pressure	0.5kg/cm²
Job Stress	6-8kg/cm²
N.W./G.W	28 /30kg
Packing Size	500 × 420 × 840mm /280 × 280 × 430mm
Code	4.10.02.06.001

Hydraulic Garage Jack




Model	2T
Rated Load	2T
Min. Height	140mm
Max. Height	285mm
N.W/G.W	5.6kg/6.2kg
Product Size	390x205x140mm
Package Size	400x205x145mm
Code	4.10.04.03.007



Model	WYS-3T	WYB-3T
Rated Load	3T	3T
Min. Height	125mm	125mm
Max. Height	480mm	480mm
N.W/G.W	30kg/31.5kg	28kg/30kg
Product Size	725x370x225mm	725x370x225mm
	double pump	one pump
Code	4.10.04.03.008	4.10.04.03.011

Scissor Jack



Model	2T
Rated Load	2t
Min. Height	120mm
Max. Height	395mm
Total Length	450mm
Stroke with Rated Load	260-390mm
N.W/G.W	3.5kg/4kg
Package Size	660x470x260mm
Pcs/Ctn	10pcs
Code	4.10.04.03.001

Tyre Instant-Inflation Sealer



Model	SD-5
Working Pressure	0.6-0.8 Mpa
Max. Pressure	1.0 Mpa
Volume	5 Gallon
N.W./G.W	10kg/11kg
Package Size	415x415x315mm
Code	3.06.07.28.001

Hydraulic Telescopic Transmission Jack



Model	0.5T
Lifting Weight	0.5T
N.W./G.W.	48kg/50kg
Package Size	740 × 440 × 260mm
Code	4.10.02.01.003

Hydraulic Press



Model	20T
Rated Load	20T
N.W./G.W	64kg/65kg
Package Size	1550 × 230 × 180mm / 230 × 120 × 120mm
Code	4.10.04.03.012

Refrigerant Recovery Machine



Model	HW-560
Rated Input	220-240V/50/60Hz
Refrigerant Type	R134a
Recovery Capacity	400g/min
Fill Capacity	1000g/min
Vacuum Pumping Capacity	5.4m³/min
Volume of Tank	13L
Electronic Scale Accuracy	1g
Electronic Scale Weighing Range	0.01kg-35kg
Packing Size	1180x670x620mm
Code	4.10.02.09.001

Beam Correction



Model	LT-B
Length	5600mm
Width	2200mm
Height	560mm
Pulling Capacity	100Kn
Air Supply Required	0.8Mpa
Radius of Pulling	360°
Max. load	3500kg
Code	4.10.01.03.001

Painting Booth Specification



Model	
Temperature	50-60°C
Inner Dimension	6900 × 3900 × 2600mm (L × W × H)
Overall Dimension	7050 × 5200 × 3200mm (L × W × H)
Front Door	three doors, 2800 × 2500mm (W × H), Aluminum alloy edging
Working Door	650 × 1800mm (W × H)
Platform	300mm, All-terrain grille
Wall panel	Thickness 50mm, Width 950mm, Color steel plate thickness 0.3m, Filler: EPS
Lighting	Inclined ceiling light 8 sets × 3pcs=24pcs 36W
Cabinet device	Measuring the in-wind, Square tube frame, Spray mask
Exhaust system	Centrifugal blower 2 sets, power 3KW, Air Flow volume: 20000m³/h
Heating system	24sets × 800W Luxury Infrared heating tube
Filtering system	Inlet filter cotton is high quality cotton with effective filtering dust above 10 mm, high effective filter cotton on the top is 600G, which can filter dust above 5 mm
Code	4.10.01.03.001



CONSTRUCTION EQUIPMENT



Plate Compactor



Model	CNP-90	90T Loncin G200F	Electric 160
Engine Type	Loncin Petrol 6.5HP	Loncin Petrol 6.5HP	380V 3KW
Frequency	4200bpm	3500-5500bpm	3500-5500bpm
Centrifugal Force	15kN	15-20kN	15-20kN
Plate Size	550x440mm	550x480mm	500x420mm
Walking Mode	Forward	Forward	Forward
Package Size	700x470x690mm/1Pcs	820x520x600mm / 1Pcs	820x520x600mm / 1Pcs
N.W/G.W	88kg/91kg	78kg/80kg	105kg/110kg
Code	4.03.01.03.002	4.03.01.03.005	4.03.01.03.006

Tamping Rammer



■ Forging gears Forging link

Model	HCR110	HCR110F	
Engine Type	LF168-2 gasoline 4.8KW (6.5HP)	Petrol gas 6.5HP	Disel 4.2HP
Max. Impact Force	10kN		
Impact Frequency	450-650bpm		
Max. Jumping Stroke	65mm		
Fuel Tank	2.8L		
Plate Size	300x280mm		
Package Size	500x450x1000mm		
N.W	77kg/87kg		
Code	4.03.01.02.005	4.03.01.02.006	4.03.01.02.007

Concrete Vibrator



Model	CNVR		CNDV	
Engine Type	Petrol 6.5HP	Diesel 5.3HP		
Motor Type			380V50Hz2.2KW	230V50Hz1.5KW
Vibrating Head Diameter	50mm		50mm	
Coupling Type	Japan		Japan	
Poker Length	6m		6m	
Package Size	520x440x440mm / 1Pcs; 850x670x65mm/Coupling		520x440x440mm / 1Pcs; 850x670x65mm/Coupling	
N.W/G.W	21kg/22.5kg(Machine)		15kg/16kg(Machine)	
N.W/G.W	19.5kg/21kg(Coupling)		19.5kg/21kg(Coupling)	
Code	4.03.03.03.001	4.03.03.03.002	4.03.03.03.003	4.03.03.03.004

Concrete Mixer



■ 2 wheels

Model	FA260L	FA350L	FA500L	FA500L
Engine Type	Air-cooled/ Diesel/4HP	Air-cooled/ Diesel/6HP	Water-cooled/ Diesel/7.7HP	/
Power	/	/	/	380V 50Hz 3kW
Feed Capacity	260L	350L	500L	
Drum Rotation Speed	18RPM	20RPM	17RPM	
Productivity	6-10m³/h	10-14m³/h	16-20m³/h	
Drum Mouth	450mm	516mm	566mm	
Drum Diameter	700mm	800mm	900mm	
Drum Height	687mm	766mm	920mm	
N.W/G.W	200kg/213kg	251kg/263kg	346kg/358kg	330kg/342kg
Code	4.03.03.01.002	4.03.03.01.003	4.03.03.01.004	4.03.03.01.005



Model	JZM800	JZM400
Power	380V 50Hz 4kW	380V 50Hz 4kW
Feed Capacity	6m³/h	5m³/h
Drum Diameter	1.1m	1.1m
Length of Drum	1.6m	1.4m
Drum Thickness	2.8mm	1.4mm
Drum Rotation Speed	30rpm	30rpm
Base Size	1050 × 1190 × 1200mm/1Pcs	1050 × 1190 × 1200mm/1Pcs
Drum	1100 × 1100 × 1600mm/1Pcs	1100 × 1100 × 1600mm/1Pcs
N.W	350kg/1Pcs	300kg/1Pcs
	8 wheels	4 wheels
Code	4.03.03.01.009	4.03.03.01.010



Model	JZC350	JZC500
Power	380V 50Hz 5.5kW+5.5kW+0.55kW	380V 50Hz 5.5kW+5.5kW+0.55kW
Feed Capacity	12m³/h	16m³/h
Drum Diameter	1.5m	1.8m
Drum Thickness	3.5mm	3.5mm
Drum Rotation Speed	14rpm	13rpm
Packing Size	2400 × 1500 × 2200mm/1Pcs	3000 × 1850 × 2400mm/1Pcs
N.W	800kg/1Pcs	1250kg/1Pcs
Code	4.03.03.01.011	4.03.03.01.012

Mortar Mixer



■ 2 wheels

Model	FE260
Engine Type	Air-cooled/ Diesel/ 9HP
Feed Capacity	255L
Package Size	1800x1200x2600mm / 2Pcs
N.W/G.W	310kg/320kg / 1Pcs
Code	4.03.03.02.001

Vibratory Roller



Model	FYL-S600C
Engine Type	Air-cooled/ Diesel/ 6HP
Starting Mode	Manual / Electric
Travel Speed	0-4km/h
Drive Type	Hydraulic Drive
Vibration Type	Mechanical
Centrifugal Force	20kN
Vibration Frequency	70Hz
Water Tank Capacity	20L
Drum Size	φ425X600mmX2
Gradeability	30°
Package Size	1360x850x1300mm / 1Pcs
Working Weight	550kg
Code	4.03.01.01.001



Model	FYL-S600CS
Engine Type	Water-cooled/ Diesel/ 5.67kW
Starting Mode	Manual / Electric
Travel Speed	0-4km/h
Drive Type	Hydraulic Drive
Vibration Type	Mechanical
Centrifugal Force	20kN
Vibration Frequency	70Hz
Water Tank Capacity	20L
Drum Size	φ425X600mmX2
Gradeability	30°
Package Size	1360x850x1300mm / 1Pcs
Working Weight	600kg
Code	4.03.01.01.003

Vibratory Roller



Model	FYL-860
Engine Type	Water-cooled/Diesel/6HP/13HP
Starting Mode	Manual / Electric
Travel Speed	0-5km/h
Drive Type	Hydraulic Drive
Vibration Type	Electromagnetic Clutch
Centrifugal Force	25kN
Vibration Frequency	70Hz
Water Tank Capacity	60L
Drum Size	φ540x740mm, φ425x675 mm
Gradeability	30°
Package Size	2100x1650x1300mm
Working Weight	800kg
Code	4.03.01.01.004



Model	FYL-880
Engine Type	Water-cooled/Diesel/9HP/ 13HP
Starting Mode	Manual / Electric
Travel Speed	0-5km/h
Drive Type	Hydraulic Drive
Vibration Type	Electromagnetic Clutch
Centrifugal Force	25kN
Vibration Frequency	70Hz
Water Tank Capacity	60L
Drum Size	φ540x740mm, φ540x800mm
Gradeability	30°
Package Size	2100x1650x1300mm
Working Weight	1000kg
Code	4.03.01.01.005

Brick Making Machine



■ With Optional Mold

Model	QMT4-40
Engine Type	Water-cooled/ Diesel/ 5.67kW
Molding Time	40s
Package Size	1270x1670x1440mm / 1Pcs
N.W/G.W	620kg/665kg
Code	4.03.07.01.001

Concrete Cutter



■ Handle Rotation ■ Manual push ■ Steel Water Tank

Model	F500-2
Engine Type	Diesel 186F 9HP
Max Cutting Depth	180mm
Blade Size	400~500mm
Water Tank Capacity	45L
Package Size	950x520x1000mm
N.W/G.W	175kg/180kg
Code	4.03.02.01.004



■ Handle Rotation ■ Manual push ■ Plastic Water Tank

Model	F500-3
Engine Type	Diesel 186F 9HP
Max Cutting Depth	180mm
Blade Size	400~500mm
Water Tank Capacity	37L
Package Size	910x500x1000mm
N.W/G.W	175kg/180kg
Code	4.03.02.01.005

Power Trowel



Model	PT100
Engine Type	Loncin Petrol 5.5HP
Rotor Diameter	91cm
Guard Diameter	100cm
Number of Blades	4
Finish Blades	35x15cm
Package Size	1020x1020x770mm
Code	4.03.05.01.004



Model	80	100
Engine Type	Honda GX690 23HP	Loncin LC2V80FD 25HP
Rotor Diameter	192mm	
Number of Blades	8	
Finish Blades	35x15mm	
Millstone Size	φ97cm	
Weight	358kg	
Package Size	2220x1140x1120mm	
Code	4.03.05.01.002	4.03.05.01.003

Steel Bar Stirrup Bender



■ Auto with foot pedal

Model	GF22	GF28	GF40
Motor Power	380V 50Hz 2.2kW	380V 50Hz 3kW	380V 50Hz 4kW
Rotation Speed of Motor	1440r/min		
Plain Carbon Steel	≤ Φ22mm	≤ Φ28mm	≤ Φ40mm
II-grade Deformed Steel Bar	≤ Φ20mm	≤ Φ25mm	≤ Φ32mm
Working Rotation Speed of Bending	20~30 r/min	25~28r/min	3~15 r/min
Max Bending Angle	180°		
Package Size	900x600x1140mm	900 × 700 × 950mm	900x900x1150mm
N.W/G.W	120kg/140kg	175kg/190kg	300kg/3250kg
Code	4.03.04.02.001	4.03.04.02.003	4.03.04.02.005

Steel Bar Bender



■ Auto with foot pedal

Model	GW40B	GW45B	GW50B
Motor Power	380V 50Hz 3kW	380V 50Hz 4kW	380V 50Hz 4kW
Rotation Speed of Motor	1440 r/min	1440 r/min	1440 r/min
Plain Carbon Steel	≤ Φ28mm	≤ Φ40mm	≤ Φ50mm
II-grade Deformed Steel Bar	≤ Φ32mm	≤ Φ32mm	≤ Φ36mm
Working Rotation Speed of Bending	20~30 r/min	20~30 r/min	3~15 r/min
Package Size	800x700x750mm	970x770x860mm	970x830x860mm
N.W/G.W	270kg/300kg	320kg/340kg	390kg/410kg
Code	4.03.04.01.004	4.03.04.01.002	4.03.04.01.003

Steel Bar Cutter



Model	GQ45A	GQ50A
Motor Power	380V 50Hz 3kW	380V 50Hz 4kW
Rotation Speed of Motor	2800r/min	2800r/min
Plain Carbon Steel	≤ Φ40mm	≤ 50mm
II-grade Deformed Steel Bar	≤ Φ32mm	≤ Φ36mm
Working Rotation Speed of Bending	32times/min	28times/min
Packing Size	1430x450x750mm	1700x900x1400mm
N.W/G.W	320kg/345kg	510kg/535kg
Code	4.03.04.03.001	4.03.04.03.002

Floor Grinder



Model	G400
Motor Power	220V 50Hz 3kW or 380V 50Hz 3kW
Motor Speed	1400rpm
Rotor Blade Diameter	400mm
Working Width	45cm
Net Weight	95kg
Package Size	800x650x950mm
Code	4.03.05.02.001



Model	G300	G330
Motor Power	380V 50Hz 4kW/1.1kw	380V 50Hz 4kW/0.75kw
Motor Speed	1500rpm	1500rpm
Rotor Blade Diameter	300mm	300mm
Working Width	33cm	35cm
Net Weight	120kg	140kg
Code	4.03.05.02.002	4.03.05.02.003

Small Slabs Lifting Crane



Model	500	800
Power	220V 50Hz 3kW	220V 50Hz 4kW
Lifting Speed	14m/7m /min	14m/7m /min
Wire Rope Length	30m	30m
Loading	500kg/250kg	800kg/400kg
Code	4.03.06.01.001	4.03.06.01.002

Pallet Lifting Truck



Model	2T	3T
Capacity	2000kg	3000kg
Max. Fork Height	200mm	200mm
Width Overall Forks	550mm	685mm
Material of Pump	Welding	Cast steel
Material of Wheel	PA6	PA6
Code	4.05.01.01.003	4.05.01.01.004

WOOD-WORKING MACHINE



Woodworking Thicknesser



Model	MB104
Motor Power	3kW 380V 50Hz
Max. Producing Width	400mm
Max. Workpiece Thickness	150mm
Max. Cutting Depth	3mm
Min. Workpiece Length	200mm
Spindle Speed	5270rpm
Overall Dimensions	725x650x850mm
Package Size	670x750x930mm
N.W/G.W	155kg/170kg
Code	4.01.03.02.001



Model	MB106
Motor Power	3kW 380V 50Hz
Max. Producing Width	600mm
Max. Workpiece Thickness	200mm
Max. Cutting Depth	4mm
Min. Workpiece Length	200mm
Spindle Speed	5270rpm
Overall Dimensions	930x650x970mm
Package Size	950x670x1070mm
N.W/G.W	215kg/230kg
Code	4.01.03.02.002

Woodworking Planner



Model	JP802
Motor Power	220V 50Hz 1500W
Table Size	1340x230mm
Fence Size	850x98mm
Cutting Width	200mm
Cutting Depth	3.175mm
Cutting Rabbeting	12.7mm
Cutterhead Diameter	65mm
Cutterhead Speed	4400rpm
Number of Knives	3
Package Size	1330x600x330mm
N.W/G.W	130kg/148kg
Code	4.01.03.01.001

Woodworking Multifunction Machine



Model	ML393B/MLQ343
Motor Power	220V 50Hz 2.2kW
Max. Planing Width	310mm
Max. Planing Depth	3mm
Max. Planing Thickness	120mm
Max. Sawing Thickness	100mm
Mortising Range	10-16mm
Spindle Speed	4200rpm
Package Size	1230x640x450mm
N.W/G.W	200kgs/220kgs
Code	4.01.07.01.001

Extension table and fence included



Model	PF16
Motor Power	220V 50Hz 3kW
Max. Planing Width	400mm
Max. Planing Depth	3mm
Max. Planing Thickness	200mm
Max. Sawing Thickness	100mm
Mortising Range	10-16mm
Spindle Speed	3600rpm
Package Size	1650x760x570mm
N.W/G.W	300kgs/335kgs
Code	4.01.07.01.002

Woodworking Miller



Model	MX5117A	MX5117B
Motor Power	4kW 380V 50Hz	5.5kW 380V 50Hz
Main Spindle Speed	10000/8000/6000rpm	10000/8000/6000rpm
Working Table Size	1150x690mm	1160x700mm
Tool Bore Diameter	35mm	35mm
Max. Working Thickness	120mm	120mm
Min. Profiling Radius	45mm	45mm
Overall Dimensions	1150x690x945mm	1160x700x945mm
Package Size	1180x710x1010mm	1160x710x990mm
N.W/G.W	280kg/300kg	350kg/370kg
Code	4.01.04.01.002	4.01.04.01.003

Woodworking Circular Saw



Model	MJ105A
Motor Power	4kW 380V 50Hz
Spindle Speed	2240rpm
Blade Diameter	500mm
Max. Sawing Thickness	140mm
Overall Dimensions	1150x630x760mm
Package Size	660x1120x850mm
N.W/G.W	125kg/145kg
Code	4.01.01.01.001

Woodworking Band Saw



Model	MJ345E
Motor Power	380V 50Hz 3kW
Spindle Speed	1000rpm
Length of Blade	4020mm
Saw Wheel Diameter	500mm
Max. Sawing Thickness	370mm
Tilting Range	0-45°
Overall Dimensions	752x916x1890mm
Package Size	975x620x1980mm
N.W/G.W	248kgs/300kgs
Code	4.01.01.02.001

Dust Collector



Model	DC100
Power	3kW
Voltage	380V 50Hz 3Phase
Cloth Bag Size	Φ480mmx2pcs
Port Size	Φ100mmx3pcs
Wind Speed	30-45mm/s
Wind Capacity	4000m³/h
N.W/G.W	57/59kg
Overall Dimension	1400x500x2050mm
Packing Size	1210x550x520mm
Code	4.01.07.04.001

Blade Sharpener



Model	MF207
Motor Power	230V 50Hz 370W
Working Length	700mm
Wheel Speed	2840rpm
Package Size	930x320x800mm
N.W/G.W	50kg/72kgs
Code	4.01.05.03.001

Woodworking Mortiser



Model	MS36127A3
Chisel Capacity	6-12mm(1/4" -1/2")
Max.Mortising Depth	76mm(3")
Drill Chuck Capacity	1-13mm
Chisel to Table	125mm
Chisel to Fence	90mm
Table Dimension	340x150mm
Over Height	700mm
Motor Power	230v 50Hz 370W
Spindle Speed	1400rpm
Package Size	570x310x280mm
N.W/G.W	27kg/25kgs
Code	4.01.06.01.001

Vacuum Laminating Press Machine



Model	TM2480B
Working Table Size	2550x1150(1300)x50mm
Overall Dimension	9300x1870x1350mm
Worktable Quantity	2 positions
Working Pressure	≥-0.09Mpa
Vacuum Pump	100m³/h German Technology
Total Power	20kw
Power Consumption	5kW/h
PVC Film Thickness	0.14-0.55mm
Voltage	380v/ 50hz 3 phases
Net Weight	2600kgs
Code	4.01.07.02.001

Edge Banding Machine



Model	ZX368	ZX388
Machine Function	Gluing→Fine Trimming→Scraping→Buffing	Gluing→End Cutting→Rough Trimming→Fine Trimming→Scraping→Buffing
Workpiece Thickness	10-55mm	
Workpiece Width	≥40mm	
Workpiece Length	≥60mm	
Edge Height	10-70mm	
Edge Thickness	0.3-3.5mm	
Feed Speed	18m/min	
Total Power	8.5kW	
Air Pressure	0.6MPa-0.8Mpa	
Net Weight	1000kg	1500kg
Overall Dimension	2800x1000x1500mm	4200x1000x1500mm
Code	4.01.07.03.001	4.01.07.03.001

Panel Saw



Model	MJ45YA
Dimension of sliding table	3200x330x375mm
Gross cut capacity	3200mm
Width of cut between saw blade and rip fence	1250mm
Cutting Height	80mm
Main Saw Blade	Φ305mmxΦ30mm
Speed of Main Saw Blade	5000-6000rpm
Scoring Saw Blade	Φ120mmxΦ20mm
Speed of Scoring Saw Blade	8000-9000rpm
Motor Power	5.5kW
Tilting Angle	0-45°
Overall Dimensions	3200x1100x1100mm
Package Size	1900x1100x1100mm
N.W/G.W	600kgs/630kgs
Code	4.01.01.03.001

ELECTROMECHANICAL EQUIPMENT



Generator



Model	KT6500LE	KT6500LEW	KT10000LE3	KT8500SE3
Rated output	220V 50Hz 4.5kW	220V 50Hz 4.5kW	220/380V 50Hz 6kW	220/380V 50Hz 6.5kW
Rated Welding Current	/	190A	/	/
Electrode diameter	/	1.6-4.0mm	/	/
Starting system	Electric start	Electric start	Electric start	Electric start
Fuel Type	Diesel	Diesel	Diesel	Diesel
Fuel tank Capacity	15L	15L	15L	15L
Continuous Time	8h	8h	8h	8h
Package size	770x520x730mm	770x520x730mm	770x520x730mm	950x570x780mm
N.W/G.W	106kg/110kg	106kg/110kg	113kg/117kg	183kg/188kg
Code	4.08.02.01.002	4.08.02.03.001	4.08.02.01.003	4.08.02.02.001
	Open frame	Dual purpose for generation and welder	Open frame	Silent type



Model	HS2500	HS3600
Rated output	220V 50Hz 2kW	220V 50Hz 2.8kW
Starting system	recoil start	recoil start
Fuel Type	Gasoline	Gasoline
Fuel tank Capacity	15L	15L
Continuous Time	11h	8h
Package size	605x445x500mm	605x445x500mm
N.W/G.W	44kg/47kg	47kg/50kg
Code	4.08.01.01.001	4.08.01.01.002



Model	HS6500E	HS9500E	HS9500SE
Rated output	220V 50Hz 5kW	220V 50Hz 7kW	220V/380V 50Hz 7kW
Starting system	Electric start	Electric start	Electric start
Fuel Type	Gasoline	Gasoline	Gasoline
Fuel tank Capacity	25L	25L	25L
Continuous Time	8h	6h	6h
Package size	695x525x585mm	710x540x595mm	710x540x595mm
N.W/G.W	82kg/86kg	107kg/111kg	107kg/111kg
Code	4.08.01.01.003	4.08.01.01.004	4.08.01.01.005

Diesel Generator Unit



Model	HQ15GF	HQ30GF
Rated Power	15kW	30kW
Engine Model	YUCHAI YC2108D	YUCHAI YC4D60-D21
Alternator Model	XINGNUO HQF-XN15	XINGNUO HQF-XN30
Control Panel	HGM6110N	HGM6110N
Overall Dimension	1600×700×1200mm	1920×740×1150mm
Weight	600kg	850kg
Code	4.08.03.02.001	4.08.03.02.002

Direct Drive Air Compressor



Model	BBM5008	HD0302(A)	HS5008
Motor Power	1.5kW 2HP 220V 50Hz	1.5kW 3HP 220V 50Hz	1.5kW 3HP 220V 50Hz
Flux (m³/min)	0.22	0.2	0.22
Max. Pressure	8bar	8bar	8bar
Tank Volume	50L	30L	50L
Package Size	690x320x660mm	680x320x620mm	660x300x640mm
N.W/G.W	25.5kg/28kg	34kg/36kg	25kg/27kg
Code	4.06.01.01.001	4.06.01.01.002	4.06.01.01.003

Oilless and Low-noise Air Compressor



Model	HDW1100-50DS
Motor Power	1.1kW 220V 50Hz
Flux (m³/min)	0.15
Max. Pressure	8bar
Tank Volume	50L
Noise	<55dB
Package Size	800x320x670mm
N.W/G.W	30kg/32kg
Code	4.06.01.02.001

Belt Air Compressor



Model	V-0.25/8	W-0.36/8	W-0.9/8
Motor Power	2.2kW 3HP 220V 50Hz	3kW 4HP 220V 50Hz	7.5kW 10HP 380V 50Hz
Flux (m³/min)	0.25	0.36	0.9
Max. Pressure	8bar	8bar	8bar
Tank Volume	80L	100L	160L
Package Size	1050x470x840mm	1230x480x870mm	1470x490x1050mm
N.W/G.W	87kg/95kg	95kg/110kg	153kg/178kg
Code	4.06.01.04.001	4.06.01.04.002	4.06.01.04.003



Model	W-0.71/12.5	V-1.05/12.5	W-0.97/12.5
Motor Power	7.5kW 10HP 380V 50Hz	7.5kW-4 10HP 380V 50Hz	7.5kW 10HP 380V 50Hz
Flux (m³/min)	0.71	1.05	0.97
Max. Pressure	12.5bar	12.5bar	12.5bar
Tank Volume	160L	230L	250L
Package Size	1470x490x1050mm	1605x590x1180mm	1560x530x1070mm
N.W/G.W	155kg/180kg	262kg/295kg	176kg/210kg
Code	4.06.01.04.004	4.06.01.04.005	4.06.01.04.006



Model	W-0.97/8	W-0.67/8	W-0.97/8-500L
Motor Power	7.5kW 10HP 380V 50Hz	4kW 10HP 380V 50Hz	7.5kW 10HP 380V 50Hz
Flux (m³/min)	0.97	0.67	0.97
Max. Pressure	8bar	8bar	8bar
Tank Volume	300L	300L	500L
Package Size	1540x540x1140mm	1550x525x1120mm	1940x710x1230mm
N.W/G.W	185kg/219kg	141kg/170kg	232kg/275kg
Code	4.06.01.04.007	4.06.01.04.008	4.06.01.04.009

Water Pump



Model	HSQGZ50-C	HSQGZ80-C
Outlet & Inlet size	50mm	80mm
Max.Flux	32m³/h	56m³/h
Max.Lift	32m	30m
Max. Power Output	6.5Hp/3600rpm	6.5Hp/3600rpm
Fuel Type	Gasoline	Gasoline
Starting System	recoil start	recoil start
Fuel tank Capacity	3.6L	3.6L
Continuous Time	2.5h	2.5h
Package Size	485x390x425mm	535x415x445mm
N.W/G.W	23kg/25kg	25kg/27kg
Code	4.09.02.01.001	4.09.02.01.002

Water Pump



Model	KT80CLE
Outlet & Inlet Size	80mm
Max.Flux	60m³/h
Max.Lift	19m
Max. Suction	8m
Max. Power Output	6Hp/3000rpm
Fuel Type	Diesel
Starting System	Electric Start
Fuel Tank Capacity	15L
Continuous Time	8h
N.W/G.W	58kg/63kg
Package Size	610x530x570mm
Code	4.09.03.01.001

Bench Grinder



Model	MD3220-200	MS3025-250
Rated Power	560W 220V 50Hz	1200W 380V 50Hz
Wheel Size	200x25x32	250x25x32
Speed	2850rpm	2850rpm
Weight	15kg	30kg
Code	4.02.02.01.001	4.02.02.01.002



Model	ZX7-200	ZX7-315	ZX7-630
Input Power	220V 50/60Hz	220V/380V 50/60Hz	380V 50/60Hz
Current Range	0-125A	0-240A	0-500A
Load Duty Cycle	60%	60%	60%
Electrode Diameter	1.6-3.2mm	1.6-4.0mm	1.6-5.0mm
Insulation Class	F	F	F
N.W	3kg	15kg	22kg
Outline Dimension	300x130x200mm	430x190x320mm	575x290x430mm
Code	4.07.01.01.007	4.07.01.01.008	4.07.01.01.009

Drill Press




Model	RDM1601BN	RDM2001BN
Rated Power	1/2HP 220V 50Hz	1HP 220V 50Hz
Swing	13"	15"
Drilling Capacity	16mm	20mm
No. of Speed	12	12
Speed Range	180-2740rpm	180-2740rpm
Spindle Travel	80mm	80mm
Weight	46kg	52kg
Code	4.02.03.01.001	4.02.03.01.002

Cut-off Saw



Model	J3G-400
Rated Power	3000W 380V 50Hz
Wheel Size	400x3.2x32
Speed	2840rpm
Weight	48kg
Code	4.02.01.02.001

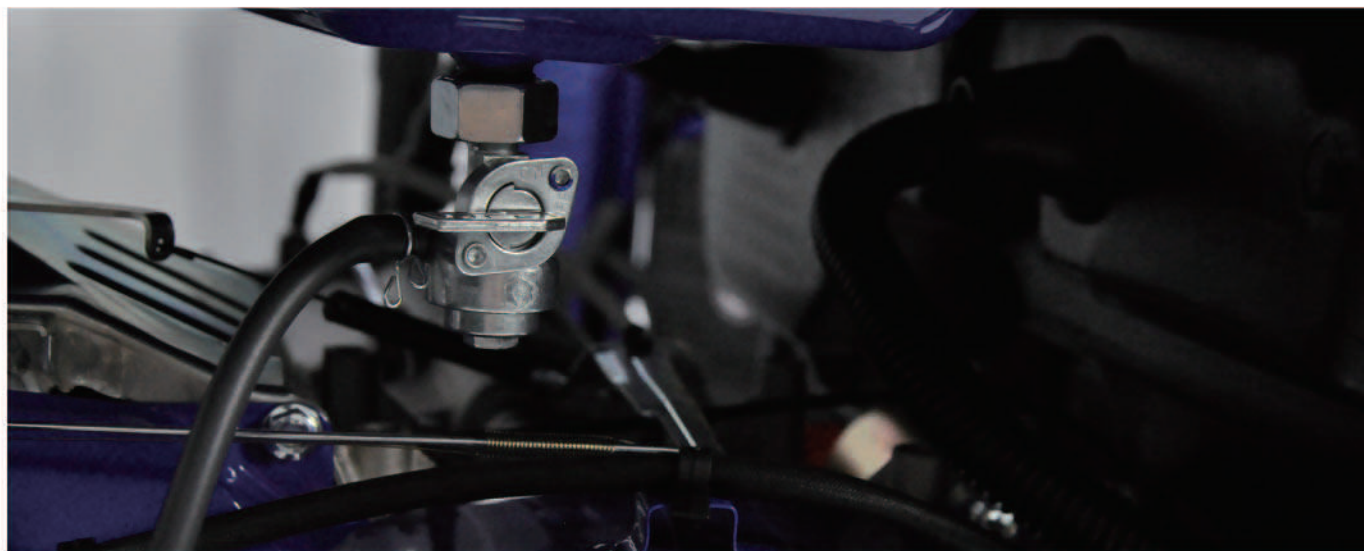

TOOLS



POWER TOOLS



Electric Drill



Model	DL1006
Motor Power	220-240V 50Hz 450W
No-load Speed	0-2800rpm
Dia. of Bit	10/10/25(Steel/Alu/Wood)
Chuck Size	10mm
Pcs/Ctn	10pcs
N.W/G.W	14.8kg/15.8kg
Package Size	262x75x256mm (color box)
Code	3.03.01.01.001

Li-ion Cordless Drill



Model	501S
Battery Pack	12V/1.5AhX2
No-load Speed	0-350/1400rpm
Drill Capacity	steel ϕ 8/wood ϕ 25mm
Max Diameter of Chuck	10mm
Max Torque	35N.m
Pcs/Ctn	10pcs
N.W/G.W	17kg/18kg
Package Size	520x390x250mm (color box)
Code	3.03.04.01.002



Model	504T
Battery Pack	21V/1.5AhX2
Impact Rate	35500bpm
No-load Speed	0-350/1400rpm
Drill Capacity	steel ϕ 10/wood ϕ 30mm
Max Diameter of Chuck	10mm
Max Torque	40N.m
Pcs/Ctn	10pcs
N.W/G.W	22kg/23kg
Package Size	490x320x670mm (BMC)
Code	3.03.04.01.003

Impact Drill



Model	DL1138P	DL1139P
Motor Power	220-240V 50Hz 750W	220-240V 50Hz 850W
No-load Speed	0-2800rpm	0-2800rpm
Impact rating	0-44800bpm	0-44800bpm
Dia. of bit	13/13/25(Steel/Concrete/Wood)	13/16/25(Steel/Concrete/Wood)
Chuck size	13mm	13mm
Pcs/Ctn	8pcs	8pcs
N.W/G.W	16.8kg/17.8kg	15.8kg/16.8kg
Package Size	306x72x238mm (color box)	315x76x265mm (color box)
Code	3.03.03.01.001	3.03.03.01.002

Light Hammer



Model	2001	2602
Motor Power	220-240V 50Hz 650W	220-240V 50Hz 850W
No-load Speed	0-850rpm	0-900rpm
Impact per Minute	0-4000	0-4000
Max. Drilling Diameter	20mm	26mm
	Color Box	BMC
		3 twist drills and 2 point&flat chisel
Code	3.03.03.02.003	3.03.03.02.004

Rotary Hammer



Model	93026	93030
Motor Power	220-240V 50Hz 800W	220-240V 50Hz 1050W
Drill Capacity	ϕ 26	ϕ 30
No-load Speed	650rpm	800rpm
Impact Rate	3200bpm	4100bpm
N.W	5.2kg	5.2kg
Code	3.03.03.02.001	3.03.03.02.002

Demolition Hammer



■ TIN BOX+CTN ■ Point & Flat Chisel

Model	92040	0810
Motor Power	220-240V 50Hz 900W	220-240V 50Hz 1200W
Impact Rate	2900r/min	3800r/min
Package Size	51x25x32/2PCS	
N.W/G.W	13kg/19kg	
Code	3.03.03.03.001	3.03.03.03.002



■ TIN BOX+CTN ■ Point & Flat Chisel

Model	65A	95
Motor Power	220-240V 50Hz 1800W	220-240V 50Hz 3200W
Impact Rate	1400r/min	2800r/min
Package Size	71x17x31cm/1PC	71x17x31cm/1PC
N.W/G.W	13.5kg/20kg	16kg/23kg
Code	3.03.03.03.004	3.03.03.03.003

Heat Gun



Model	DT2000X
Power	220-240V 50Hz 2000W
Air Flow	250-500L/min
Temperature	50-650°C
Pcs/Ctn	12pcs
Net Weight	11kg
Package Size	480x270x540mm
Code	3.03.05.01.002

Cut-off Machine



Model	30355
Motor Power	220-240V 50Hz 2450W
Blade Diameter	355mm
No-load Speed	3900rpm
N.W	15.5kg
Package Size	570x340x440mm
Code	3.03.01.02.001

Mitre Saw



Model	255A
Motor Power	220-240V 50Hz 1800W
No-load Speed	5500rpm
Dia.of Saw Blade	255mm
N.W/G.W	12kg/13.5kg
Package Size	520x480x415mm
Code	3.03.02.06.001

Angle Grinder



Model	1031	1032	1038	81230
Motor Power	220-240V 50Hz 750W	220-240V 50Hz 950W	220-240V 50Hz 1100W	220-240V 50Hz 3080W
Disc Diameter	100mm	115mm	125mm	230mm
No-load Speed	11000rpm	11000rpm	11000rpm	6600rpm
Pcs/Ctn	10pcs	10pcs	6pcs	4pcs
N.W/G.W	22kg/23kg	23kg/24kg	22kg/23kg	21kg/22kg
Package Size	570x340x250mm	570x340x250mm	420x355x260mm	475x380x290mm
Code	3.03.01.04.001	3.03.01.04.002	3.03.01.04.003	3.03.01.04.008

Angle Grinder Stand



Model	BG-125/115
Overall Dimension	240x190x280mm
Code	3.03.01.04.009
	Suitable for angle grinder with disc diameter 115mm or 125mm
	Cast iron base

Drill Stand



Model	BG-6109B
Clamping Range	Φ35-Φ43mm
Code	3.03.01.01.005
	Cast iron base

Marble Cutter



Model	4002
Motor Power	220-240V 50Hz 1230W
Blade Diameter	110mm
No-load Speed	13000rpm
N.W/G.W	3.5kg/3.75kg
Package Size	460x240x370mm
Code	3.03.03.04.001

Electric Hand-Mixer



Model	6113
Motor Power	220-240V 50Hz 800W
No-load Speed	0-550rpm
Stirring Diameter	φ160mm
Rod Length	600mm
N.W/G.W	3.8kg/4.2kg
Package Size	460x240x370mm
Code	3.03.03.05.001

Diamond Drill




Model	DP-255T
Motor Power	220-240V 50Hz 3500W
No-load Speed	650rpm
Drilling Capacity	φ200mm
Pcs/Ctn	1pcs
N.W/G.W	18.4kg/20.93kg
Package Size	865x330x215mm
Code	3.03.03.06.001

AIR TOOLS



Brad Nailer



Model	ST64X
Dimension	90x275x330mm
Weight	3.3kg
Operating Pressure	80-110psi
Max.Pressure	120psi
Load Capacity	70Pcs
Code	3.02.01.01.001




Model	RP9069/F50A
Dimension	55x235x255mm
Weight	1.37kg
Operating Pressure	70-110psi
Max.Pressure	120psi
Load Capacity	100Pcs
Code	3.02.01.01.002



Model	T64RC
Dimension	320x300x80mm
Weight	1.85kg
Operating Pressure	70-110psi
Max.Pressure	120psi
Load Capacity	100Pcs
Code	3.02.01.01.003

2-in-1 Nailer/Stapler

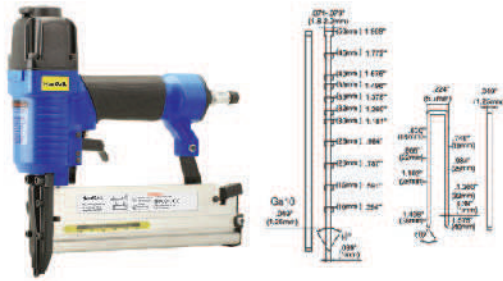

Model	SF5040
Dimension	55x235x255mm
Weight	1.37kg
Operating Pressure	70–110psi
Max. Pressure	120psi
Load Capacity	100Pcs
Code	3.02.01.02.001

Air Impact Wrench



Model	RP17407
Square Drive	1/2"
Working Pressure	90psi
Working Torque	610N.m
Air Inlet (NPT)	1/4"
Air Hose (ID)	3/8"
Capacity Bolt Size	M16
Free Speed	7500rpm
Sug. Air Com. (HP)	3HP
Avg. Air Consumption	142.5L/min
Net Weight	2.1kg
Overall Length	185mm
Code	3.02.02.01.001



Model	RP7465
Square Drive	1"
Working Pressure	90psi
Working Torque	2700N.m
Air Inlet (NPT)	1/2"
Air Hose (ID)	5/8"
Capacity Bolt Size	M45
Free Speed	4000rpm
Sug. Air Com. (HP)	5HP
Avg. Air Consumption	998L/min
Net Weight	15.5kg
Overall Length	584mm
Code	3.02.02.01.002

HAND TOOLS



Screwdriver



Code	Specification	Material
3.01.05.01.001	5x75mm ⊕	S2
3.01.05.01.002	6x100mm ⊕	S2
3.01.05.01.003	6x150mm ⊕	S2



Code	Specification	Material
3.01.05.02.001	5x75mm ⊕	S2
3.01.05.02.002	6x100mm ⊕	S2
3.01.05.02.003	6x150mm ⊕	S2

Double Open Mirror Wrench



Code	Specification	Material
3.01.02.02.001	6–7mm	Cr–V
3.01.02.02.002	8–10mm	Cr–V
3.01.02.02.003	9–11mm	Cr–V
3.01.02.02.004	10–12mm	Cr–V
3.01.02.02.005	12–14mm	Cr–V
3.01.02.02.006	13–15mm	Cr–V
3.01.02.02.007	13–16mm	Cr–V
3.01.02.02.008	14–17mm	Cr–V
3.01.02.02.009	16–18mm	Cr–V
3.01.02.02.010	17–19mm	Cr–V
3.01.02.02.011	18–21mm	Cr–V
3.01.02.02.012	19–22mm	Cr–V
3.01.02.02.013	22–24mm	Cr–V
3.01.02.02.014	24–27mm	Cr–V
3.01.02.02.015	27–30mm	Cr–V
3.01.02.02.016	30–32mm	Cr–V

Full Mirror Polished Combination Wrench



Code	Specification	Material
3.01.02.03.003	6mm	Cr-V
3.01.02.03.004	7mm	Cr-V
3.01.02.03.005	8mm	Cr-V
3.01.02.03.006	9mm	Cr-V
3.01.02.03.007	10mm	Cr-V
3.01.02.03.008	11mm	Cr-V
3.01.02.03.009	12mm	Cr-V
3.01.02.03.010	13mm	Cr-V
3.01.02.03.011	14mm	Cr-V
3.01.02.03.012	15mm	Cr-V
3.01.02.03.013	16mm	Cr-V
3.01.02.03.014	17mm	Cr-V
3.01.02.03.015	18mm	Cr-V
3.01.02.03.016	19mm	Cr-V
3.01.02.03.017	21mm	Cr-V
3.01.02.03.018	22mm	Cr-V
3.01.02.03.019	24mm	Cr-V

Double Ring Mirror Wrench



Code	Specification	Material
3.01.02.04.003	6-7mm	Cr-V
3.01.02.04.004	8-10mm	Cr-V
3.01.02.04.005	9-11mm	Cr-V
3.01.02.04.006	10-12mm	Cr-V
3.01.02.04.007	12-14mm	Cr-V
3.01.02.04.008	13-15mm	Cr-V
3.01.02.04.009	13-16mm	Cr-V
3.01.02.04.010	14-17mm	Cr-V
3.01.02.04.011	16-18mm	Cr-V
3.01.02.04.012	17-19mm	Cr-V
3.01.02.04.013	18-21mm	Cr-V
3.01.02.04.014	19-22mm	Cr-V
3.01.02.04.015	22-24mm	Cr-V
3.01.02.04.016	24-27mm	Cr-V
3.01.02.04.017	27-30mm	Cr-V
3.01.02.04.018	30-32mm	Cr-V

Utility Knife



Code	Model	Specification	Material
3.01.06.08.001	L523	18x0.5mm	Aluminum alloy

Code	Model	Specification	Material
3.01.06.08.002	KB-601	18x0.5mm	TPR

Code	Model	Specification	Material
3.01.06.08.003	KB-601X	18x0.5mm	TPR&Aluminum alloy

Boutique Combination Plier



Code	Specification	Material
3.01.03.01.001	8"/200mm	Cr-V
3.01.03.01.003	6"/150mm	Cr-V
3.01.03.01.004	7"/170mm	Cr-V

Long Nose Plier



Code	Specification	Material
3.01.03.02.002	8"/200mm	Cr-V
3.01.03.02.003	6"/150mm	Cr-V

Diagonal Plier



Code	Specification	Material
3.01.03.03.002	7"/170mm	Cr-V

Tape Measure



Code	Model	Specification	Material
3.01.01.01.001	3G48W	3mx16mm	ABS
3.01.01.01.003	5G48X	5mx25mm	ABS
3.01.01.01.004	7HG48X	7.5mx25mm	ABS

Diamond Cutting Disc



Code	Specification
3.06.03.01.001	Φ105x1.4x20mm
3.06.03.01.002	Φ114x25.4x2.4mm
3.06.03.01.003	Φ114x20x1.8mm
3.06.03.01.004	Φ125x25.4x2.4mm
3.06.03.01.005	Φ180x25.4x2.4mm
3.06.03.01.006	Φ230x25.4x2.4mm
3.06.03.01.007	Φ350x25.4x3.2mm
3.06.03.01.008	Φ450x25.4x3.8mm

Grinding Disc



Code	Specification
3.06.01.03.001	Φ100x6x16mm
3.06.01.03.002	Φ115x6x22.2mm
3.06.01.03.003	Φ125x6x22.2mm
3.06.01.03.004	Φ180x6x22.2mm
3.06.01.03.005	Φ230x6x22.2mm


Cutting Disc



Code	Specification
3.06.01.02.001	Φ100x2.5x16mm
3.06.01.02.002	Φ115x1x22.2mm
3.06.01.02.003	Φ125x1.2x22.2mm
3.06.01.02.004	Φ355x2.5x25.4mm
3.06.01.02.005	Φ400x2.5x32mm
3.06.01.02.006	Φ107x1.2x16mm
3.06.01.02.007	Φ180x1.6x22mm
3.06.01.02.008	Φ230x1.6x22mm


LIFTING AND RIGGING
PRODUCTS

G80 Lifting Chain




Code	Dia. mm	Size (d x p)	Specification(mm)		WLL (T)	Weight kg/m
			Min Inner Width	Max Outer Width		
1.11.01.01.001	6	6x18	7.5	21	1.1	0.79
1.11.01.01.002	7	7x21	9	24.5	1.5	1.07
1.11.01.01.003	8	8x24	10	28	2	1.38
1.11.01.01.004	10	10x30	12.5	35	3.2	2.2
1.11.01.01.005	12	12x36	15	42	4.6	3.1
1.11.01.01.006	13	13x39	16.3	46	5	3.8
1.11.01.01.007	14	14x42	18	49	6.3	4.13
1.11.01.01.008	16	16x48	20	56	8	5.63
1.11.01.01.009	18	18x54	23	63	10	6.85
1.11.01.01.010	19	19x57	23.7	63.2	11.3	7.7
1.11.01.01.011	20	20x60	25	70	12.5	8.6
1.11.01.01.012	22	22x66	28	77	15.3	10.2
1.11.01.01.013	24	24x72	32	82	18	12.78
1.11.01.01.014	26	26x78	35	91	21.3	14.87
1.11.01.01.015	30	30x90	38	105	28.3	19.6
1.11.01.01.016	32	32x96	40	106	32.2	22.29
1.11.01.01.017	34	34x102	46.5	121.5	36.3	25.5
1.11.01.01.018	36	36x108	49.5	128.5	40.7	31
1.11.01.01.019	38	38x114	52	136	45.3	32
1.11.01.01.020	42	42x126	55.5	144.5	55.4	38.6
1.11.01.01.021	48	48x144	62.4	177.6	72.3	52
1.11.01.01.022	50	50x150	65	185	80	55.9

G100 Lifting Chain



Code	Dia. mm	Size (d x p)	Specification(mm)		WLL (T)	Weight kg/m
			Min Inner Width	Max Outer Width		
1.11.01.02.001	6	6x18	7.5	21	1.3	0.79
1.11.01.02.002	7	7x21	9	24.5	2	1.07
1.11.01.02.003	8	8x24	10	28	2.5	1.38
1.11.01.02.004	10	10x30	12.5	35	4	2.2
1.11.01.02.005	13	13x39	16.3	46	6.7	3.8
1.11.01.02.006	16	16x48	20	56	10	5.63
1.11.01.02.007	19	19x57	23.7	63.2	14	7.7
1.11.01.02.008	20	20x60	25	70	15.6	8.6
1.11.01.02.009	22	22x66	28	77	19.1	10.2
1.11.01.02.010	26	26x78	35	91	27	14.87
1.11.01.02.011	32	32x96	40	106	40	22.29

G80 European Type Connecting Link

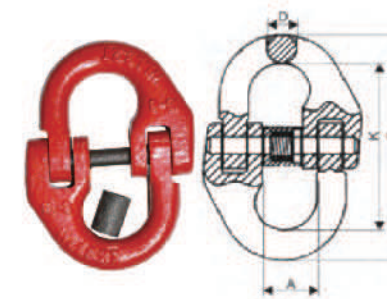


Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)			
				A	B	K	D
1.09.01.05.001	6-8	0.075	1.2	16.2	37	42	7
1.09.01.05.002	7/8-8	0.16	2	20.5	48	58	8.5
1.09.01.05.003	10-8	0.285	3.2	28	60	68	10.8
1.09.01.05.004	13-8	0.595	5.3	30	76	90	15
1.09.01.05.005	16-8	1.1	8	36.3	91	101.9	19.8
1.09.01.05.006	20-8	1.8	12.5	44	109	121	24
1.09.01.05.007	22-8	3.2	15	51	130	141.5	26
1.09.01.05.008	26-8	4.5	21.2	58	152	161	30
1.09.01.05.009	32-8	9	31.5	67.5	190	197	37

G80 U.S Type Connecting Link




Code	Size (in)	Weight (kg)	WLL (lbs)	Dimension(mm)					
				A	B	C	D	E	F
1.09.01.07.001	1/4	0.28	3500	0.36	1.88	1.75	0.78	0.66	0.56
1.09.01.07.002	5/16	0.33	4500	0.39	2.13	1.97	0.88	0.69	0.63
1.09.01.07.003	3/8	0.73	7100	0.52	2.5	2.5	1.03	0.88	0.75
1.09.01.07.003	1/2	1.67	12000	0.64	3.44	3.44	1.44	1.13	0.94
1.09.01.07.005	5/8	2.86	18100	0.75	4.13	4.13	1.73	1.41	1.13
1.09.01.07.006	3/4	5	28300	0.97	4.94	4.94	2.08	1.63	1.28
1.09.01.07.007	7/8	7.5	34200	1.08	6.5	6.5	2.31	2	1.44
1.09.01.07.008	1	11.03	47700	1.22	6	6	2.5	2.25	1.88
1.09.01.07.009	1-1/4	20.38	72300	1.5	7.43	7.3	3.06	2.56	2.19

G80 Lifting Welded D-ring

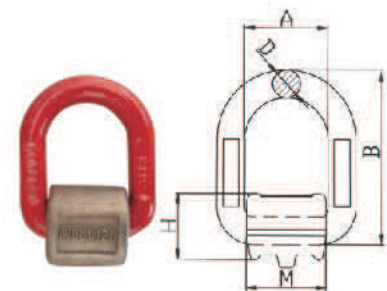


Code	Weight (kg)	WLL (T)	Dimension(mm)				
			A	B	D	H	M
1.08.07.04.001	0.4	1.12	41.0	78.0	13.0	30.0	37.0
1.08.07.04.002	0.48	2	42.0	88.0	14.0	33.0	40.0
1.08.07.04.003	0.69	3.15	45.0	94.0	17.0	35.0	42.5
1.08.07.04.004	1.5	5.3	55.0	118.0	22.0	47.5	51.0
1.08.07.04.005	2.5	8	70.5	140.0	26.0	56.5	65.0
1.08.07.04.006	4.25	10	85.0	165.0	30.0	70.0	90.0
1.08.07.04.007	5.79	15	98.0	189.0	34.0	77.0	90.0

G80 Eye Self-Locking Hooks




Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)					
				A	B	D	R	H	M
1.08.01.01.005	6-8	0.5	1.1	22	34	10.5	110.5	20	15
1.08.01.01.006	7/8-8	0.8	2	25	46	12	136	24	20
1.08.01.01.004	10-8	1.5	3.15	32	58	13	169	28	26
1.08.01.01.001	13-8	2.8	5.3	40	69	16.5	208	40.5	32.5
1.08.01.01.002	16-8	5.4	8	50	86	20	254.5	50.5	41
1.08.01.01.003	20-8	10	12.5	61	92	26.5	290	62	50
1.08.01.01.007	22-8	13.4	15	72	98	30	320	65	52
1.08.01.01.008	26-8	18.5	21.2	80	110	34.3	362	75	60
1.08.01.01.009	32-8	44.5	31.5	105	166	45	472	97	79.5

G80 Sling Hook Eye Type




Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)					
				A	B	E	N	H	L
1.08.02.01.001	6-8	0.3	1.1	20	74	22	20.5	18	122
1.08.02.01.002	7/8-8	0.5	2	25.5	83	26	23.5	18	138.5
1.08.02.01.003	10-8	0.8	3.2	32.5	107	34	30	20	176.5
1.08.02.01.004	13-8	1.9	5.3	39.5	134.3	41	37.5	29.5	218
1.08.02.01.005	16-8	3.4	8	50	157.5	44	42.5	34	260
1.08.02.01.006	20-8	5.3	12.8	60	189	52	53	44	310
1.08.02.01.007	22-8	8.9	15	68	239	60	74	50	375.5
1.08.02.01.008	26-8	13.4	21.2	75	245	71	83	63	412
1.08.02.01.009	32-8	19	31.5	88	250	102	95	76	446

G80 Self Locking Hook Clevis Type




Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)				
				B	C	D	E	W
1.08.01.02.004	6-8	0.4	1.1	34	96	32	28	69
1.08.01.02.005	7/8-8	0.7	2	46	118.5	36	36	88
1.08.01.02.001	10-8	1.5	3.15	58	144	46	45	107
1.08.01.02.002	13-8	2.7	5.3	69	181.5	59	50	138
1.08.01.02.003	16-8	5.6	8	86	216	70	60	182
1.08.01.02.006	20-8	10.5	12.5	92	238	81	72	204
1.08.01.02.007	22-8	13.8	15	98	276	98	78	205
1.08.01.02.008	26-8	18.2	21.2	110	311	118	106	240

G80 Swivel Hook with Latch

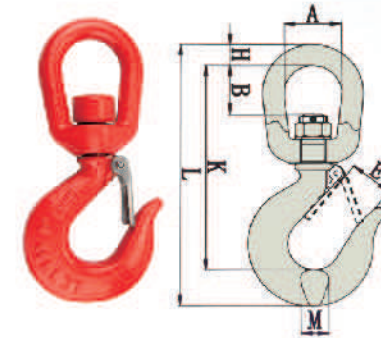

Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)						
				A	E	B	H	K	L	M
1.08.04.01.001	6-8	0.88	1.12	1.25	0.88	0.94	0.37	4.47	5.61	0.63
1.08.04.01.002	8-8	2.27	2	1.75	1	1.63	0.63	6.02	7.71	0.83
1.08.04.01.003	10-8	2.84	3.15	1.75	1.12	1.56	0.63	6.37	8.19	0.91
1.08.04.01.004	13-8	5.13	5.3	2	1.34	1.75	0.75	7.41	9.61	1.1
1.08.04.01.005	16-8	10.4	8	2.5	1.69	2.31	1	9.59	12.43	1.4
1.08.04.01.006	20-8	16.23	12.5	2.75	2.06	2.37	1.13	11.13	14.5	1.61
1.08.04.01.007	22-8	23.41	15	3.13	2.24	2.81	1.25	11.94	15.89	2.22
1.08.04.01.009	26-8	47.14	21.2	4.14	3.19	4.49	1.57	16.97	21.5	2.72
1.08.04.01.010	32-8	70.48	31.5	4.14	3.25	4.13	1.57	18.58	23.46	3

G80 Sling Hook Clevis Type




Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)					
				A	B	E	N	H	L
1.08.03.01.001	6-8	0.3	1.12	7.5	32	22	18	20.5	121
1.08.03.01.002	7/8-8	0.5	2	9	36	25.5	18	23.5	137
1.08.03.01.003	10-8	0.95	3.15	12	46	34	20	30	175.5
1.08.03.01.004	13-8	1.9	5.3	15	59	41.5	29.5	37.5	210.5
1.08.03.01.005	16-8	3.45	8	17.5	70	46	34	42.5	248.5
1.08.03.01.006	20-8	6.5	12.5	23	80	52	45	54	309
1.08.03.01.007	22-8	9.65	15	25.5	98	60	48	76	375.5

G80 Swivel Hook with Bearing




Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)						
				A	B	C	C1	D	E	W
1.08.01.05.005	6-8	0.71	1.1	15	32.5	164.5	35	11.5	28	69.7
1.08.01.05.001	8-8	1.12	2	20	36	204	42	13	36.5	88
1.08.01.05.002	10-8	2	3.15	26	42	240.5	50	15.5	45	107.7
1.08.01.05.003	13-8	4	5.3	32.5	50	284.5	60	17	53.6	137
1.08.01.05.004	16-8	7.3	8	38	61	350.5	65	21.5	61	165.5

G80 Grab Hook Clevis Type

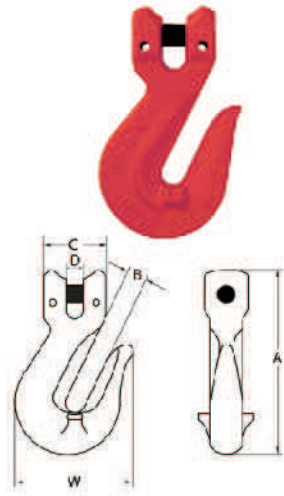


Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)				
				A	B	C	D	W
1.08.06.05.001	6-8	0.28	1.12	78	8	32	7.5	41
1.08.06.05.002	7/8-8	0.3	2	108	11	36	9	57
1.08.06.05.003	10-8	0.95	3.15	127	13	46	12	70
1.08.06.05.004	13-8	1.97	5.3	163	16	59	15	89
1.08.06.05.005	16-8	3.45	8	204	20	70	17.5	109
1.08.06.05.006	20-8	5.3	12.5	243	23	80	23	130
1.08.06.05.007	22-8	7.8	15	280	26	98	25.5	151
1.08.06.05.008	26-8	14.5	21.2	309	30	110	30	175

G80 Foundry Hook Eye Type

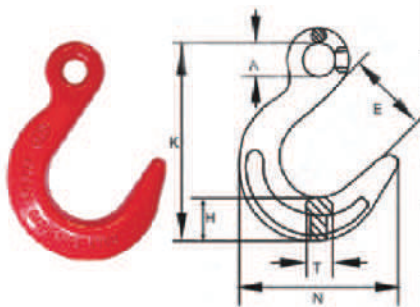


Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)					
				K	T	N	A	H	E
1.08.05.01.001	7/8-8	1	1.6	163	25.4	120	18	31	63.5
1.08.05.01.002	10-8	2.24	3.2	200	32.6	146	22	38	76
1.08.05.01.003	13-8	3.22	5.3	238	38.1	171	27	44.5	89
1.08.05.01.004	16-8	4.99	8	278	46	198	32	52	102
1.08.05.01.005	20-8	9.29	12.5	325	55	232	38	65	114.5
1.08.05.01.006	22-8	11.93	15	361	57	256	45	69	127.5
1.08.05.01.007	26-8	16.8	21.2	402	66	283	67.5	77	140
1.08.05.01.008	32-8	26.6	31.5	461	80	327	81.5	97.5	153.5

G80 Clevis Foundry Hook

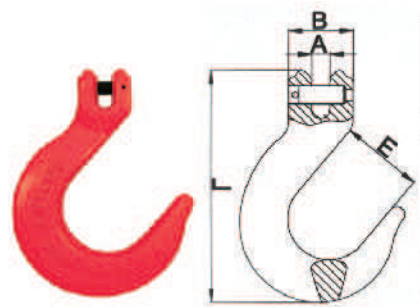


Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)			
				A	B	E	L
1.08.05.02.002	7/8-8	2.42	2	0.37	1.46	2.5	6.34
1.08.05.02.001	10-8	5.51	3.15	0.51	1.93	3.03	7.83
1.08.05.02.003	13-8	7.28	5.3	0.63	2.17	3.35	8.37
1.08.05.02.004	16-8	12.33	8	0.85	2.78	3.7	9.49
1.08.05.02.005	20-8	17.62	10	0.95	3.48	4.17	10.71
1.08.05.02.006	22-8	26.21	15	1.1	3.58	4.49	11.89

G80 Eye Shortening Grab hook

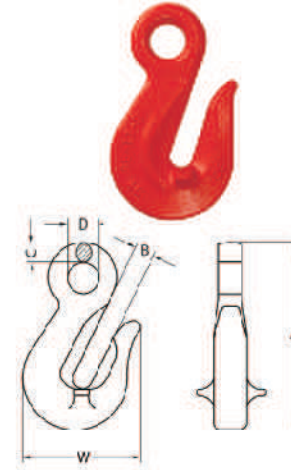


Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)				
				A	B	C	D	W
1.08.06.01.002	6-8	0.25	1.12	76.5	8	8	13	45
1.08.06.01.001	7/8-8	0.4	2	106	11	9.5	16	63
1.08.06.01.004	10-8	0.6	3.15	126	13	12	20	79
1.08.06.01.005	13-8	1.2	5.3	156	16	15	25	100
1.08.06.01.006	16-8	2.7	8	193	20	19	28.5	122
1.08.06.01.007	20-8	4.3	12.5	226	25	20	36	150.5
1.08.06.01.008	22-8	6.4	15	269	26	27	42	169
1.08.06.01.009	32-8	19.4	21.2	361	38	38	57	189

G80 Large Opening Eye Hook

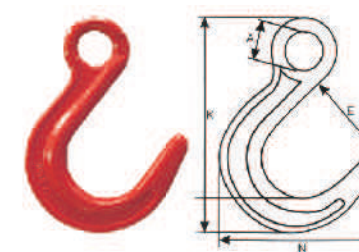


Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)				
				K	N	A	H	E
1.08.05.03.002	6-8	0.38	1.2	133	100	20.5	19	49
1.08.05.03.003	7/8-8	0.75	2	158.6	130	24	26	62
1.08.05.03.001	10-8	0.99	3.2	199	152.5	31.5	31	73
1.08.05.03.004	13-8	2.6	5.3	241.5	186	44	38.5	90
1.08.05.03.005	16-8	5	8	279	218	49	41	105
1.08.05.03.006	20-8	6.42	12.5	330	252	60	57	114

G80 Twist Eye Choker Hook




Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)		
				A	K	C
1.08.02.03.001	7/8-8	0.36	2	30	91	16
1.08.02.03.002	10-8	0.73	3.2	38	115	20
1.08.02.03.003	13-8	1.4	5.3	51	145	27
1.08.02.03.004	16-8	3.17	8	63	185	31

Eye Hook 320A Alloy Steel

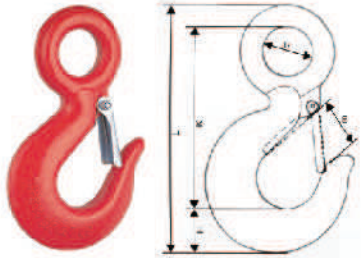


Code	Carbon WLL(T)	Alloy WLL(T)	Weight (kg)	Dimension(mm)				
				K	L	R	H	E
1.08.14.01.011	0.5	0.75	0.21	72	97	16.5	17	19
1.08.14.01.001	0.75	1	0.28	82	110	19	19	22
1.08.14.01.002	1	1.5	0.4	93.5	125	23	21	23
1.08.14.01.003	1.5	2	0.6	103	140.5	28	26	24
1.08.14.01.004	2	3	0.87	119	162	31	28	27.5
1.08.14.01.005	3	4.5	1.7	146	201	39	37	33
1.08.14.01.006	5	7	3.1	186.5	256	51	46.5	40
1.08.14.01.007	7.5	11	5.9	231.5	317	62	57	51
1.08.14.01.009	10	15	9	261	360	73	67	57
1.08.14.01.012	15	22	16.25	318	434	89	76	75
1.08.14.01.013	20	30	27.2	360	495.5	90	91	82

G80 Shortening Clutch

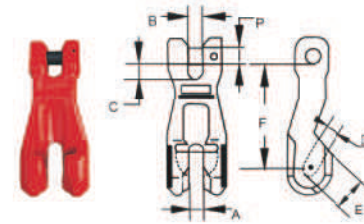

Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)						
				A	B	C	D	E	F	P
1.08.06.06.001	6-8	0.31	1.2	7	7	8	7.5	12	43	7
1.08.06.06.002	7/8-8	0.385	2	9	8.5	10	10	18	64	9
1.08.06.06.003	10-8	0.97	3.2	12.5	12	15	12	28	90	13
1.08.06.06.004	13-8	1.92	5.3	16.5	16	19	15.5	34.5	115	16
1.08.06.06.005	16-8	2.9	8	20.5	21	20.5	19.5	40	143	21
1.08.06.06.006	20-8	5.2	12.5	22	22	24	22.5	46	152	24
1.08.06.06.007	22-8	8.5	15	25.5	25.5	30.5	26	57.5	195	28


Clevis Hook 330 Carbon Steel

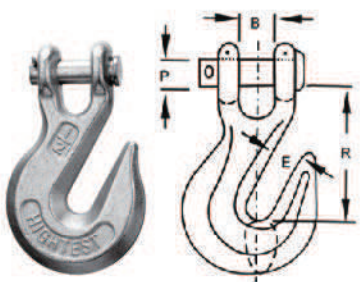

Code	Size (in)	W.L.L.(lbs)		Dimension(in)			
		H-330	A-330	B	E	P	R
1.08.14.03.001	1/4	2600	3600	0.36	0.4	0.38	1.97
1.08.14.03.002	5/16	3900	5400	0.4	0.44	0.44	2.26
1.08.14.03.003	3/8	5400	7500	0.48	0.5	0.47	2.63
1.08.14.03.004	7/16	7200	10000	0.66	0.56	0.56	2.75
1.08.14.03.005	1/2	9200	12750	0.75	0.66	0.63	3.19
1.08.14.03.006	5/8	12750	19000	0.91	0.78	0.75	4.09
1.08.14.03.007	3/4	18500	27000	0.94	0.94	0.88	4.63




Code	Size (in)	Weight (lbs)	American chain	WLL (0-45° Angle)	Rope working load	Regular marking
1.09.01.04.001	1/2	1.8	7/32	2.36	2.4	WLL2.36T
1.09.01.04.002	5/8	3.52	1/4	3.15	3.2	WLL3.15T
1.09.01.04.003	11/16	3.52	1/4	3.15	3.2	WLL3.15T
1.09.01.04.004	3/4	4.29	5/16	4.25	4.2	WLL4.25T
1.09.01.04.005	7/8	6.96	3/8	6.7	8	WLL6.7T
1.09.01.04.006	11/8	14.85	1/2	11.2	12	WLL11.2T
1.09.01.04.007	11/4	20.48	5/8	17	17	WLL17T
1.09.01.04.008	11/2	40.48	3/4	23.6	25	WLL23.6T
1.09.01.04.009	13/4	58.52	7/8	31.5	31.5	WLL31.5T




Dimension						
A	B	D	a	b	d	S
3.94±0.2	2.36±0.20	0.55±0.04	3.35±0.20	1.57±0.12	0.47±0.04	0.24
6.3±0.24	3.54±0.20	0.71±0.04	3.94±0.20	2.36±0.20	0.55±0.04	0.30±0.02
6.3±0.24	3.54±0.20	0.71±0.04	3.94±0.20	2.36±0.20	0.55±0.04	0.30±0.02
6.3±0.24	3.54±0.20	0.79±0.04	3.94±0.20	2.36±0.20	0.55±0.04	0.30±0.02
7.09±0.24	3.94±0.20	0.87±0.04	5.91±0.24	2.76±0.20	0.71±0.04	0.33±0.02
10.63±0.28	5.51±0.24	1.1±0.04	6.30±0.24	3.54±0.20	0.87±0.04	0.53±0.02
10.63±0.28	5.51±0.24	1.26±0.04	7.09±0.24	3.94±0.2	0.98±0.04	0.65±0.02
11.81±0.28	6.30±0.24	1.57±0.04	10.63±0.28	5.51±0.24	1.22	0.75±0.02
13.39±0.39	7.08±0.24	1.77±0.04	11.22±0.28	6.10±0.24	1.42	0.87±0.02

G80 Weld-on Excavator Hook

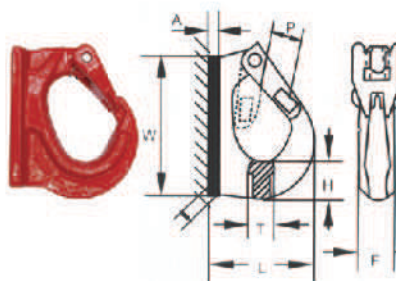


Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)						
				A	W	P	T	L	H	F
1.08.07.01.001	2T	0.84	2	5	80	25	20	94	24	34
1.08.07.01.002	3T	1.18	3	6	115	30	24	105	30	36
1.08.07.01.003	5T	2.5	5	10	155	34	28	132	43	44
1.08.07.01.004	8T	3.26	8	12	160	34	38	135	51	51
1.08.07.01.005	10T	5.17	10	15	200	50	39	167	55	53

G80 Master Link A343

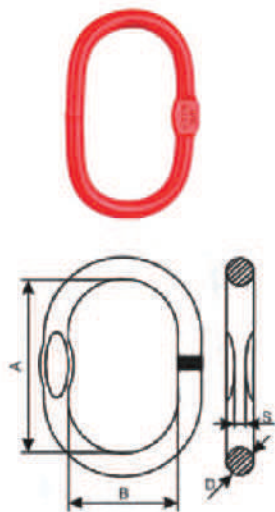

Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)		
				A	B	D
1.09.01.01.001	6-8	0.41	1.6	110	60	14
1.09.01.01.002	7/8-8	0.54	2.12	110	60	16
1.09.01.01.003	8-8	0.83	3.15	135	75	18
1.09.01.01.004	10-8	1.5	5.3	160	90	22
1.09.01.01.005	13-8	2.32	8	180	100	26
1.09.01.01.006	16-8	3.96	11.2	200	110	32
1.09.01.01.007	18-8	6.34	14	260	140	36
1.09.01.01.008	20-8	8.97	17	300	160	40
1.09.01.01.009	22-8	12.83	21.2	340	180	45
1.09.01.01.010	26-8	16.57	31.5	350	190	50

G80 Master Link Assembly A346

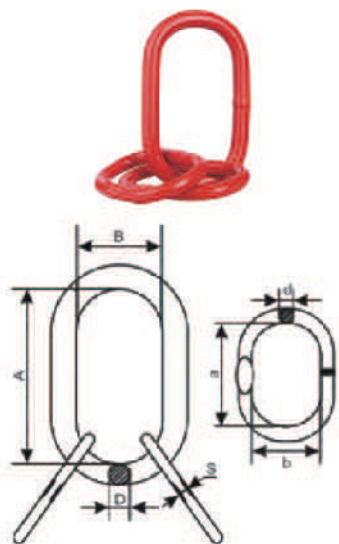

Code	Size (mm)	Weight (kg)	WLL (T)	Dimension(mm)					
				A	B	D	a	b	d
1.09.01.03.001	6-8	1.27	2.36	135	75	18	54	35	14
1.09.01.03.002	7-8	1.33	3.15	135	75	18	60	38	14
1.09.01.03.003	8-8	2.19	4.25	160	90	22	70	34	16
1.09.01.03.004	10-8	3.81	6.7	180	100	25	85	40	18
1.09.01.03.005	13-8	6.08	11.2	200	110	32	110	50	22
1.09.01.03.006	16-8	11.38	17	260	140	36	140	65	25
1.09.01.03.007	18-8	20.09	21.2	340	180	45	180	110	32
1.09.01.03.008	20-8	23.83	26.5	350	190	50	180	110	32
1.09.01.03.009	22-8	27.14	31.8	355	178	50	180	100	38
1.09.01.03.010	26-8	35.14	45	400	200	56	200	115	40
1.09.01.03.011	32-8	47.48	50	430	220	63	180	100	45



In order to ensure that the products provided to our customers are qualified, we have established in-depth strategic cooperation with Qingdao Jingrui testing company to carry out systematic testing of Haosail machinery products. Qingdao Jingrui testing Co., Ltd is a third-party technical service company specializing in inspection and testing services, mainly engaged in the physical and chemical performance testing of metal materials and products, marine equipment and other products. Jingrui testing has CNAs and CMA qualification, and has mechanical laboratory, chemical laboratory, etc. The existing equipment of the company mainly includes: 630t tensile testing machine, 100t universal testing machine, automatic impact testing machine, flaw detector, hardness tester, metallographic microscope, spectrometer, salt spray testing machine, etc., which can provide customers with physical and chemical tests such as mechanical properties, chemical composition, metallographic structure, salt spray test and size measurement Product failure analysis service. Its current customers include famous domestic enterprises and institutions such as Provincial Academy of Sciences, and foreign companies like Survitec in UK.

